INSTRUMENT
APPROACH CHART (IAC) - ICAO

AD ELEV 328 m

L'VIV
VOR RWY 13

BEARINGS ARE MAGNETIC ELEV-ALT-HGT IN METRES	TRANSITION LEVEL: by ATC TRANSITION ALT: 3050	L'viv Radar 120,525 L'viv Tower 128,000

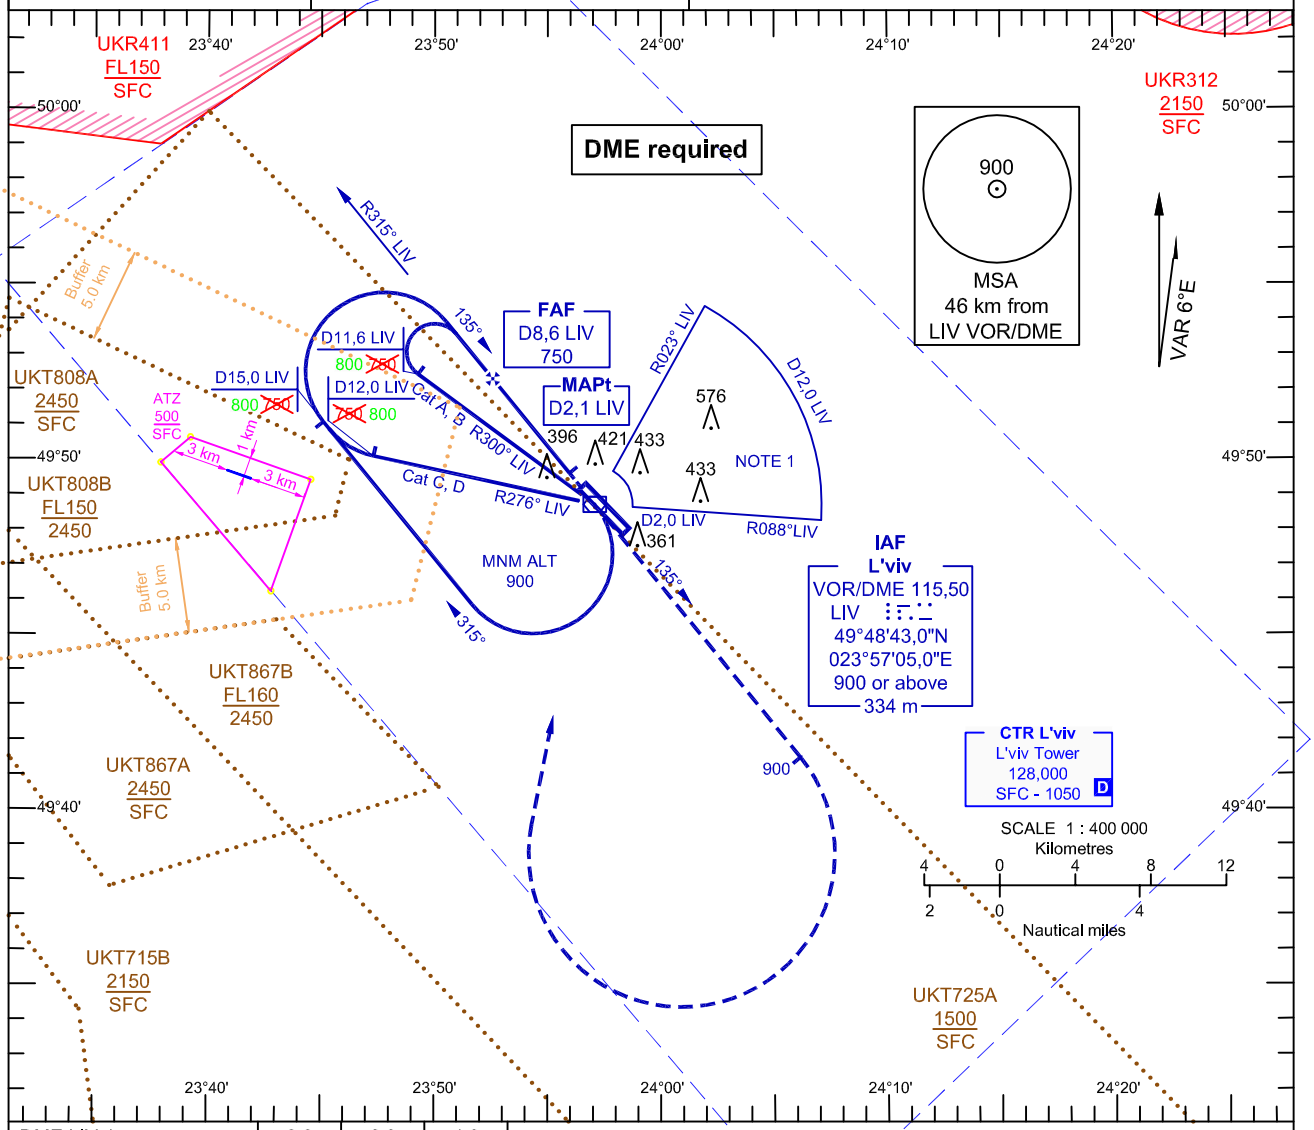

DME LIV, km	8,0	6,0	4,0
DIST DTHR, km	7,27	5,27	3,27
ALT(HGT), m	725(395)	620(295)	515(190)

MISSED APPROACH RADIO COMM FAILURE:
Climb on track 135° to 900(575), turn RIGHT climbing 1200(875) to LIV VOR/DME, HOLD OVER 5 min, then according to chart.

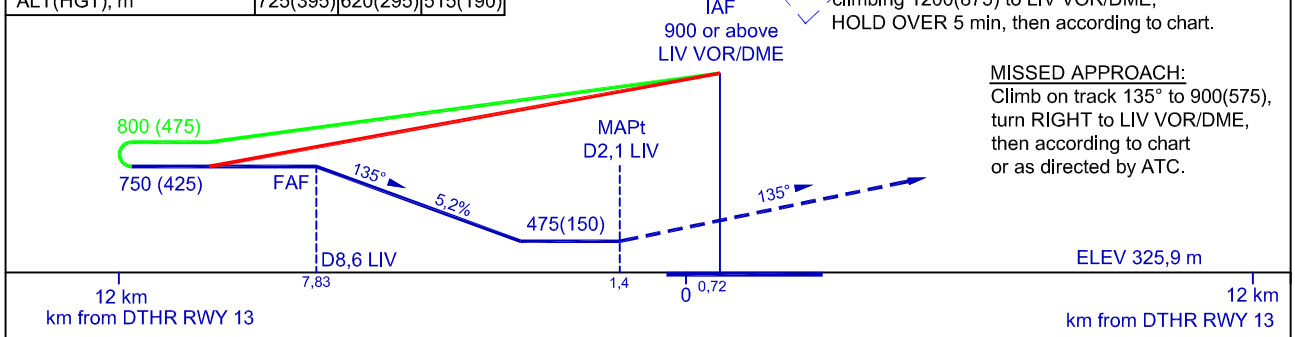

MISSED APPROACH:
Climb on track 135° to 900(575), turn RIGHT to LIV VOR/DME, then according to chart or as directed by ATC.

OCA/H		A	B	C	D
Straight-in Approach					
	LIV VOR	475(150)	475(150)	475(150)	475(150)
Circling		525(195)	525(195)	700(370)	700(370)

NOTE:
1. All flights in the sector below 900 m not authorized.
2. Timing not authorized for defining the MAPt.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360
RATE OF DESCENT	m/s	2,2	2,6	3,0	3,5	3,9	4,3	4,8	5,2